

# LEACH-E: AN ENERGY-EFFICIENT CLUSTERING PROTOCOL FOR IMPROVING THE INTER-CLUSTER COMMUNICATION OF WIRELESS SENSOR NETWORKS

G. Subhash Chandra Gupta<sup>1</sup>, Mohammad Amjad<sup>2</sup>, M. Arvindhan<sup>3</sup> and Jayasri Subramaniam<sup>4</sup>

<sup>1,2</sup>Department of Computer Engineering, Jamia Millia Islamia, India

<sup>3</sup>School of Computing Science and Engineering, Galgotias University, India

<sup>4</sup>Division of Computing, University of Northampton, United Kingdom

## Abstract

Wireless Sensor Networks (WSN) comprises distributed sensors that are used to measure items. Lowering battery power for both the sensor would shorten its working life. It is also necessary to increase the lifetime of sensors because it will affect the network speed of information transmission. By using low-energy adaptive clustering, energy can be managed to a certain extent in an intelligent network (LEACH). The key notion of this upgraded algorithm would be to compare the entire location and the existing energy of the node. The new method of attack, known as LEACH-E Improving hierarchical routing can allow operations to progress. Since the improvement of CH selection techniques and the LEACH performs optimally.

## Keywords:

Cluster Communication, Wireless Sensor Networks, LEACH-E, Energy Efficiency

## 1. INTRODUCTION

Energy management is an important concern because of the restricted energy sources and the rapid deployment of sensor nodes. The knowledge, based on LEACH algorithms, we have discusses the Energy-Efficient LEACH Algorithm for improvising the wireless techniques on WSNs (EE-LEACH) [1] [2].

This makes the high-quality of cluster heads efficient and cost-effectively. The data distinguished by the nodes need to be conveyed to a control center wherever the end-user can admittance of the data. There are several kinds of models for networks.

Contemplation of entire nodes in the network is standardized and vitality controlled. Also, the battery residual amount of value for the mobile nodes is very high. Thus, the network lifespan enrichment is a perplexing problem and major research field for the investigators [2]-[6].

It consumes a lot of energy in comparison to the intensive computing that takes place. Hence the effective communication methods must be used to extend the lifespan of the network. The right procedures must be in place for replacing the older technique to improve the efficiency. A cluster-based approach is organized with WSNs is an effective process.

A cluster head is accountable for having the nodes in its cluster pass on information to the base station. Thus aggregation needed more resources [8]. One of the furthestmost fascinating and notable co-clustering mechanisms is LEACH. Efficiency in network design is dependent on the consensus of the cluster heads. This algorithm helps to promote to evaluate the likelihood that a node can convert a cluster head to reduce energy consumption [9].

## 2. RELATED WORK

Through wireless communications, the transmission signal takes on the form of electromagnetic waves that spread from transmitter to receiver as a power-law result of the separation amongst some of the transmitter and receiver. Both unrestricted space models including patch and ground template were measured and compared, including terrain considerations. Available storage model used and two parallel republican principles are used where the distance is less than the crossover [10] [11].

$$d_{crossover} = \frac{4\pi h_r h_t \sqrt{L}}{\lambda} \quad (1)$$

where,  $L \geq 1$  - Loss factor of the system.  $h_r$  - Height of the antenna (receive),  $h_t$  - Height of the antenna (Transmits), and  $\lambda$  - Wavelength of the carrier signal.

Information consumes huge amount of resources. With high level of communication the data are passed to the system hence the unambiguous, intelligible correspondence consumes more power. This same methodology of this study is to create clusters, find a node that has the maximum remaining energy in the cluster, not necessarily a cluster heads node, and combine data, and then send it to the base station. If this is done, then it will reduce the amount of power used by the base station node [12].

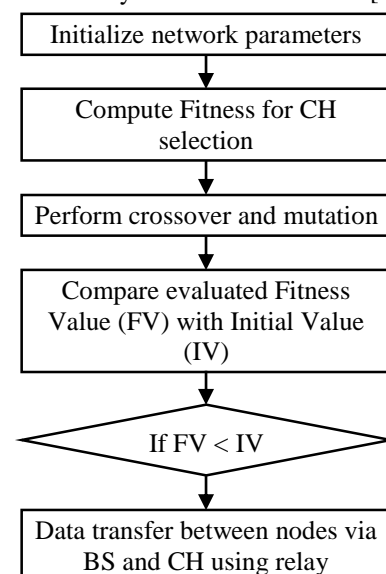


Fig.1. Architecture flow of data transfer on LEACH

Data consumes a lot of resources. Data are passed to the manager and hence the high-level communication consumes more power. So the approach used in this paper is the following. Locate

the maximum energy node from the cluster and it should not be the root node. Unite information and forward it to the base station. If this is done, then it will reduce the number of power used by the cluster head node. In LEACH (Fig.1), data on CHs aggregates can increase the lifetime of the network and reduce the network traffic [13]. Though, the biggest downside of the LEACH protocol is an incomplete yet random set of people (CHs). Low node clusters use fewer resources because they have fewer living cells than high node clusters. The uneven network density would harm network efficiency.

### 3. AN ENERGY-EFFICIENT HIERARCHICAL ARCHITECTURE

The Less Energy Adaptive Clustering Hierarchy (LEACH) protocol incorporates TDMA style contention free communication through a clustering scheme. The whole protocol is a mechanism that helps to remove the burden on a central node and make it spreads to various nodes. A framework comprises one cluster head and one or more participants who only talk with their cluster head. Clustering is an efficient form of sensor network coordination as it allows data collection and in-network dispensation at the cluster head to decrease the expanse of traffic to the base station. To lengthen the battery life of the sensor network, all the nodes are put under the control of the LEACH protocol [14].

$$T(n) = \begin{cases} \frac{P}{1 - P \left( r \bmod \frac{1}{P} \right)} & \text{if } n \in G \\ 0 & \text{otherwise} \end{cases} \quad (2)$$

#### 3.1 ALGORITHM FOR CLUSTER HEAD SELECTION

The best algorithm for CH selection is using a random choice to pick the CH. As a result, the cluster head would need more energy resources compared to other forms of sensors. By rotating the head of the network to both the sensor nodes, the load would be fairly distributed. Especially, at the opening of each stout, each sensor node is configured to participate as a CH. The study considered  $E$  as the set of the energy of entirely the  $N$  nodes and  $K$  as the estimated number of clusters then  $X$  and  $Y$  as the positions of different nodes in Wireless Sensor [15].

Network the algorithm meant for cluster head assortment in EELEACH-C works as follows:

**Algorithm CH-Selection (A,B,C,P,Q)**

```
Asc-sort(A)
i = 1
while I ≤ N do
    if (Ai ≥ AAvg and x ≤ y) then
        Eligible(x) = True
    else
        Eligible(x) = False
    end if
    x=x + 1
end while
```

if ( $dist_i > dist_j$  and Eligible(x)) then

$$CH_i = CM_j$$

end if

return ( $CH_i, CH_j$ )

### 4. NETWORK MODEL

For that kind of proposed method, some rational expectations for the case study were already proposed.

- The base station is set and cannot be relocated.
- Sensor nodes are homogeneous and uniform without energy constraint with no damage.
- No movement of sensors.
- All nodes will converge to BS.
- Node size for RAM system should be adequate to hoard their expanse from the ground station.

Table.1. Comparison of different parameters sector

Algorithm	Nodes	Parameters		
		FND	TND	HND
LEACH	N=50	938	1016	1212
EH-LEACH		1632	2072	2328
LEACH	N=200	1009	1099	1221
EH-LEACH		1723	2026	2295
LEACH	N=500	1025	1146	1234
EH-LEACH		1618	1974	2320

Table.2. Comparison of Delay (s)

Algorithm	Nodes	Parameters		
		FND	TND	HND
EH-LEACH	N=50	2.37	2.57	3.07
LEACH		4.13	5.24	5.89
EH-LEACH	N=200	2.55	2.78	3.09
LEACH		4.36	5.13	5.81
EH-LEACH	N=500	2.59	2.90	3.12
LEACH		4.09	4.99	5.87

Table.3. Comparison of Network Throughput (KBPS)

Algorithm	Nodes	Parameters		
		FND	TND	HND
LEACH	N=50	248711	269392	321362
EH-LEACH		432725	549391	617269
LEACH	N=200	267536	291400	323748
EH-LEACH		456853	537194	608519
LEACH	N=500	271779	303862	327195
EH-LEACH		429013	523406	615148

It is supposed that all cluster heads have the same quantity of total energy. It is implicit that the sensor nodes are unvaryingly distributed over the sensor area. We allocate a weight  $I$  with to the

likelihood of a node pitch to be a cluster head. This momentum needs to be the same as the mass times the original momentum. Only high-weighted nodes will be qualified for the posts of cluster heads (CHs) in the following round. The probability of CM to die earliest is less than the possibility of a CM [16]. The comparison of the proposed algorithm with several parametric sectors are discussed in Table.1 to Table 4.

Table.4. Comparison of Energy Consumption (J)

Algorithm	Nodes	Parameters		
		FND	TND	HND
EH-LEACH	N=50	5.84	6.33	7.55
LEACH		10.17	12.91	14.51
EH-LEACH	N=200	6.29	6.85	7.61
LEACH		10.74	12.62	14.30
EH-LEACH	N=500	6.39	7.14	7.69
LEACH		10.08	12.30	14.46

The correlation of the energy usage of the nodes is, LEACH seems to be the above, new LEACH is the other. In our earlier examples, initial energy is the energy consumed throughout the first few seconds of the calculation. The estimated initial energy in different rings is poor at the beginning in the new LEACH case compared with the LEACH case, but it rises gradually with the time in the LEACH case to values that are greater than those in the new LEACH case after about 20 to 40 seconds. Below that, there is little distinction between the case of LEACH and new LEACH [17]. Either way, energy can be fed to the battery without rapid discharge, but there is not up to 30 minutes to 1-hour time difference between LEACH and new LEACH systems.

## 5. CONCLUSION

Most control implementations include wireless sensors to provide input to control systems. To extend the life of the network, a method of efficient energy clustered-based routine is imperative. In this work, with modernized implementation of LEACH-E protocol designed for the Wireless Sensor Network. The central objective of this paper is to create a cluster head assortment algorithm that selects the best candidates from a pool of candidates as their workloads change. This paper analyses the LEACH protocol CH election mechanism as to its limitations, proposing a new location-based and residual energy approach for cluster head choice. Comparison of simulation shows that the novel algorithm improves the execution time by 41.7% but decreases the energy consumption. Also, the total energy consumption at the beginning of the simulation is higher than that of LEACH, which needs to be changed in the future. With this optimization and algorithmic results are essential in creating the new wireless sensor protocol broad applicability, stable and efficient performance.

## REFERENCES

[1] D. Maresch and J. Gartner, "Make Disruptive Technological Change Happen-The Case of Additive Manufacturing",

*Technological Forecasting and Social Change*, Vol. 155, pp. 1-15, 2020.

[2] M.E. Ahmed and H. Kim, "DDoS Attack Mitigation in Internet of Things Using Software Defined Networking", *Proceedings of International Conference on Big Data Computing Service and Applications*, pp. 6-9, 2017.

[3] T. Karthikeyan and K. Praghash, "An Improved Task Allocation Scheme in Serverless Computing using Gray Wolf Optimization (GWO) based Reinforcement Learning (RL) Approach", *Wireless Personal Communications*, Vol. 117, No. 3, pp. 1-19, 2020.

[4] S. Kannan, G. Dhiman, and M. Gheisari, "Ubiquitous Vehicular Ad-Hoc Network Computing using Deep Neural Network with IoT-Based Bat Agents for Traffic Management", *Electronics*, Vol. 10, no. 7, pp. 785-796, 2021.

[5] L. Atzori and A. Iera, "The Internet of Things: A Survey", *Computer Networks*, Vol. 54, No. 15, pp. 2787-2805, 2010.

[6] M. El Hajj, M. Chamoun, A. Fadlallah and A. Serhrouchni, "Analysis of Authentication Techniques in Internet of Things (IoT)", *Proceedings of International Conference on Cyber Security in Networking*, pp. 1-3, 2017.

[7] L. Celia and Y. Cungang, "Authenticated Key Management Protocols for Internet of Things", *Proceedings of International Conference on Internet of Things*, pp. 126-129, 2018.

[8] Steve R. Gunn and Basel Halak, "Lightweight PUF-Based Authentication Protocol for IoT Devices", *Proceedings of International Conference on Verification and Security*, pp. 38-43, 2018.

[9] T. Kothmayr, C. Schmitt, W. Hu, M. Br and G. Carle, "DTLS based Security and Two-Way Authentication for the Internet of Things", *Ad Hoc Networks*, Vol. 11, No. 8, pp. 2710-2723, 2013.

[10] Amiya Kumar, Suraj Sharma, Deepak Puthal, Abhishek Pandey and Rathin Shit, "Secure Authentication Protocol for IoT Architecture", *Proceedings of International Conference on Information Technology*, pp. 220-224, 2017.

[11] B. Hong Jin, Walter Guttman and Dog Seong Kim, "A Framework for Automating Security Analysis of the Internet of Things", *Journal of Network and Computer Applications*, Vol. 83, pp. 12-27, 2017.

[12] J. Jiang and L. Shu, "Authentication protocols for Internet of Things: A Comprehensive Survey", *Security and Communication Networks*, Vol. 2017, pp. 1-18, 2017.

[13] M.N. Aman, M.H. Basheer and B. Sikdar, "Two-Factor Authentication for IoT with Location Information", *IEEE Internet of Things*, Vol. 6, No. 2, pp. 3335-3351, 2018.

[14] P. Gope and B. Sikdar, "Lightweight and Privacy-Preserving Two-Factor Authentication Scheme for IoT Devices", *IEEE Internet of Things*, Vol. 6, No. 1, pp. 580-589, 2018.

[15] N.G. Veerappan Kousik, K. Suresh, R. Patan and A.H. Gandomi, "Improving Power and Resource Management in Heterogeneous Downlink OFDMA Networks", *Information*, Vol. 11, No. 4, pp. 203-216, 2020.

[16] R. Amin, N. Kumar and G.P. Biswas, "A Light Weight Authentication Protocol for IoT-Enabled Devices in Distributed Cloud Computing Environment", *Future Generation Computer Systems*, Vol. 78, pp. 1005-1019, 2018.

- [17] Yong Li and Lijun Liao, "Flexible Certificate Revocation List for Efficient Authentication in IoT", *Proceedings of International Conference on Internet of Things*, pp. 1-7, 2018.
- [18] P. Mahalle, S. Babar, N. Prasad and R. Prasad, "Identity Management Framework Towards Internet of Things (IoT): Roadmap and Key Challenges", *Proceedings of International Conference on Virtual Local Area Network Technology and Applications*, pp. 430-439, 2010.
- [19] K.W. Kim, Y.H. Han and S.G. Min, "An Authentication and Key Management Mechanism for Resource Constrained Devices in IEEE 802.11-based IoT Access Networks", *Sensors*, Vol. 17, No. 10, pp. 1-20, 2017.
- [20] G. Dhiman, K. Somasundaram and K. Sharma, "Nature-Inspired-Based Approach for Automated Cyberbullying Classification on Multimedia Social Networking", *Mathematical Problems in Engineering*, Vol. 2021, pp. 1-21, 2021.
- [21] P.K. Dhillon and S. Kalra, "Multi-Factor User Authentication Scheme for IoT-Based Healthcare Services", *Journal of Reliable Intelligent Environments*, Vol. 4, No. 3, pp. 141-160, 2018.
- [22] M. Wazid, A.K. Das, V. Odelu and N. Kumar, "Design of Secure User Authenticated Key Management Protocol for Generic IoT Networks", *IEEE Internet of Things*, Vol. 5, No. 1, pp. 269-282, 2017.
- [23] N.V. Kousik, P. Johri and M.J. Divan, "Analysis on the Prediction of Central Line-Associated Bloodstream Infections (CLABSI) using Deep Neural Network Classification", *Proceedings of International Conference on Computational Intelligence and Its Applications in Healthcare*, pp. 229-244, 2020.
- [24] T. Song, R. Li, B. Mei, J. Yu, X. Xing and X. Cheng, "A Privacy Preserving Communication Protocol for IoT Applications in Smart Homes", *IEEE Internet of Things*, Vol. 4, No. 6, pp. 1844-1852, 2017.
- [25] A.K. Das, P. Sharma, S. Chatterjee and J.K. Sing, "A Dynamic Password-Based User Authentication Scheme for Hierarchical Wireless Sensor Networks", *Journal of Network and Computer Applications*, Vol. 35, No. 5, pp. 1646-1656, 2012.
- [26] P. Johri, "Improved Energy Efficient Wireless Sensor Networks using Multicast Particle Swarm Optimization", *Proceedings of International Conference on Innovative Advancement in Engineering and Technology*, pp. 1-6, 2020.
- [27] O.R. Vincent and O. Folorunso, "A Descriptive Algorithm for Sobel Image Edge Detection", *Proceedings of International Conference on Informing Science and IT Education*, pp. 97-107, 2009.
- [28] J.H. Lin, C.W. Chou and C.H. Yang, "A Chaotic Levy Flight Bat Algorithm for Parameter Estimation in Nonlinear Dynamic Biological Systems", *Computer and Information Technology*, Vol. 2, No. 2, pp. 56-63, 2012.
- [29] M. Abdalla, P. Fouque and D. Pointcheval, "Password-Based Authenticated Key Exchange in the Three-Party Setting", *Proceedings of International Conference on Theory and Practice in Public Key Cryptography*, pp. 65-84, 2005..